

TMRW23L

Torque Motor



Electrical specifications

Winding code : SA	Symbol	Unit	Free air convection	Water cooling
Continuous torque	T_c	Nm	14.2	35
Continuous current	I_c	A_{rms}	4.9	12.3
Stall torque	T_s	Nm	10	25
Stall current	I_s	A_{rms}	3.4	8.6
Peak torque(for 1sec.)	T_p	Nm	40.7	66.5
Peak current(for 1sec.)	I_p	A_{rms}	14.7	33.2
Torque constant	K_t	Nm/Arms	2.8	
Electrical time constant	T_e	ms	6.1	
Resistance (line to line at 25°C)	R_{25}	Ω	1.9	
Inductance (line to line)	L	mH	11.5	
Number of poles	2p		22	
Back emf constant (line to line)	K_v	Vrms/rad/s	1.6	
Motor constant (at 25°C)	K_m	Nm/ $\sqrt{W}$	1.72	
Thermal resistance	R_{th}	K/W	1.39	0.22
Thermal sensor			PTC SNM100+SNM120+Pt1000	
Max. DC BUS		V_{DC}	750	
Inertia of rotor	J	kgm^2	0.0027	
Thermal time constant	T_{th}	s	2750	180
Max. continuous power dissipation	P_c	W	93	592
Max. peak power dissipation	P_p	W	4315	
Rated speed(at 600VDC)		rpm	820	


Mechanical specifications

	Symbol	Unit	Free air convection	Water cooling
Mass of rotor	M_r	kg	0.95	
Mass of stator	M_s	kg	6.1	
Height of stator	H_s	mm	80	
Height of rotor	H_r	mm	31	
Length of rotor centring fit	H	mm	10	
Water temperature difference for P_c	$\Delta\theta$	K	-	5
Minimum water flow	q	l/min	-	1.7
Max. pressure drop	Δp	bar	-	1

T-N curve

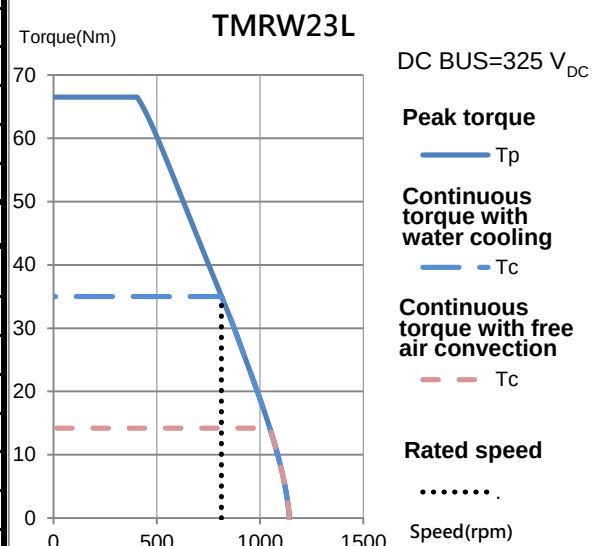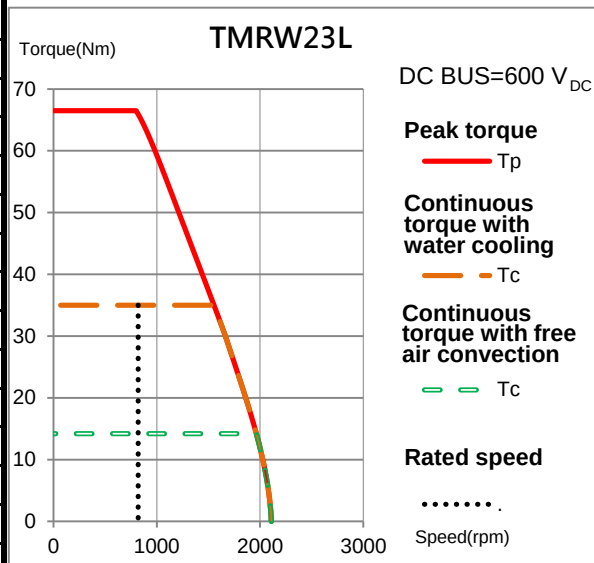

Thermal sensor

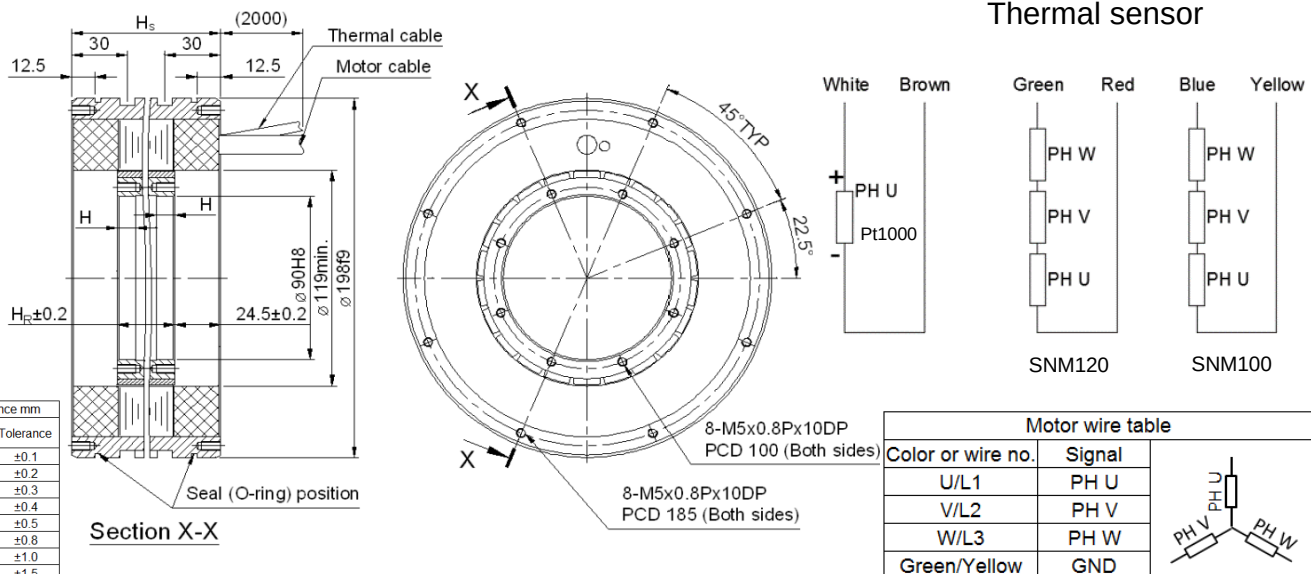Except dimensions, all the specifications in the table are in $\pm 10\%$ of tolerance

Version: 2.00

This drawing is only for reference, detail dimensions please refer to approval drawing.

Date: 2020/10/23